



# SIGENERGY

## Home Energy Solution

Let the world enjoy green energy



**Sigenergy** focuses on developing cutting-edge home and business energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.

**Sigenergy Australia Pty. Ltd.**

[www.sigenergy.com](http://www.sigenergy.com)

Suite 02 Level 7, 191 Clarence St, Sydney NSW 2000, Australia

# CONTENTS

## Brand

About SIGENERGY

## Product

Residential Solution

Product Portfolio

## Trusted Partner

Intelligent Manufacturing

Solar-powered Manufacturing

Quality Assurance

Global cases



## ABOUT SIGENERGY

**Sigenergy** focuses on developing cutting-edge home and business energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

**VISION**  
Enjoy Green Energy

**MISSION**  
Be a distributed energy pioneer.  
Build intelligent energy solutions with superior safety,  
ultra simplicity, and outstanding performance.

# SIGEN

**S**afe **I**ntelligent **G**reen **E**fficient **N**ew

# SIGENERGY HOME ENERGY SOLUTION

Combining solar, storage and EV charging, Sigenergy offers an all-in-one Home Energy Solution that helps you lower utility bill and reliance on the grid. Simple to install, easy to use, smart & safe all around, our system is versatile and scalable to meet every need.

Let numbers talk  
Sigenergy is raising industry standards

**15 mins**

stackable installation

**5 layers**

battery protection

**280 Ah**

long cycle-life battery cell

**0 ms**

load-side disruption

**5 mins**

fast commissioning

**IP66**

SigenStor protection rating

**25 kW**

fast EV charging at home

**1-click**

full system diagnosis



Simple



Versatile




Robust



Intelligent



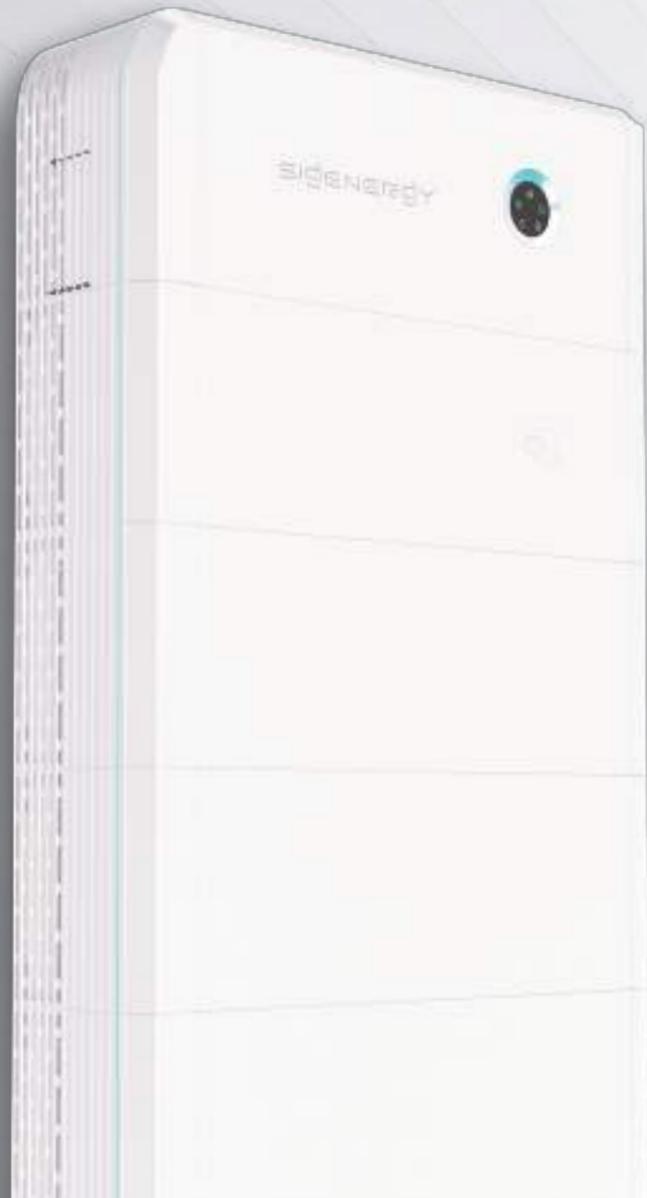

▶ **Sigen Energy Controller**  
for solar + energy storage system

▶ **Sigen EV DC Charging Module**  
Ready for V2X


▶ **Sigen Battery**

**8.0** **5.0**  
Flexible mixed use

**1 – 6**  
batteries stackbale for each stack

**Multiple**  
systems supported in parallel connection

## 5-in-One, highly integrated design

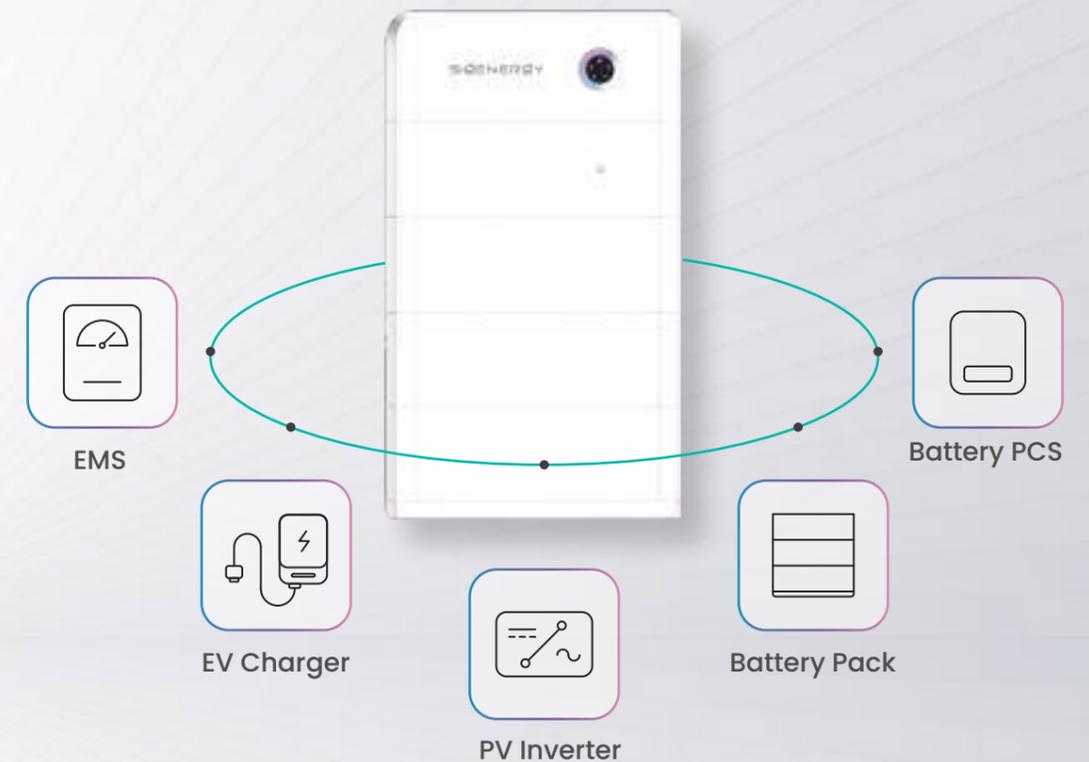

Sigenenergy is leading a new way of storing, transferring, and consuming home energy. We provide a genuine all-in-one solar energy storage system, SigenStor. Its unique 5-in-One modular design integrates Solar Inverter, EV DC Charger, Battery PCS, Battery Pack, and EMS into one intelligent home energy system. Simple, robust and versatile, it will be a great addition to your home.

## Start small, grow on demand

						
Controller	x 1	x 1	x 1	x 1	x 1	x 1
Battery	x 1	x 2	x 3	x 4	x 5	x 6



# Sigen Energy Controller

**5.0 – 12.0 kW** Single Phase  
**5.0 – 30.0 kW** Three Phase

- EMS inside for precise control
- On & off-grid compatibility
- Up to 4 MPP. trackers (three phase)
- DC/AC ratio up to 2 (single phase)
- Multi-source black start
- IP66 system protection rating

## Sigen Energy Controller 5.0–12.0 kW Single Phase Australia

SigenStor EC	5.0 SP	6.0 SP	8.0 SP	10.0 SP	12.0 SP	Units	
<b>DC Input (from PV)</b>							
Max. PV power	10000	12000	16000	20000	24000	W	
Max. DC input voltage			600			V	
Nominal DC input voltage			350			V	
Start-up voltage			100			V	
MPPT voltage range			50 ~ 550			V	
Number of MPP trackers	2	2	3	4	4		
Number of PV strings per MPPT			1				
Max. input current per MPPT			16			A	
Max. short-circuit current per MPPT			20			A	
<b>AC Output (on-grid)</b>							
Nominal output power	4999	6000	8000	9999	12000	W	
Max. output apparent power	4999	6600	8800	9999	12000	VA	
Nominal output current	21.7	27.3	36.4	43.4	54.6	A	
Max. output current	21.7	30.0	40.0	43.4	54.6	A	
Nominal output voltage	220 / 230 / 240			220 / 230		V	
Nominal grid frequency			50 / 60			Hz	
Power factor		0.8 leading ~ 0.8 lagging					
Total current harmonic distortion			THDi < 2%				
<b>Efficiency</b>							
Max. efficiency	98.0%	98.0%	97.6%	97.6%	97.6%		
European efficiency	97.4%	97.4%	97.0%	97.0%	97.0%		
<b>AC Output (backup)</b>							
Nominal output power	5000	6000	8000	10000	12000	W	
Max. output apparent power	5500	6600	8800	11000	13200	W	
Peak output power (10 seconds)	7500	9000	12000	15000	18000	W	
Nominal output current	22.7	27.3	36.4	45.5	54.6	A	
Max. output current	25.0	30.0	40.0	50.0	60.0	A	
Peak output current (10 seconds)	34.1	40.9	54.6	68.2	81.8	A	
Nominal output voltage	220 / 230 / 240			220 / 230		V	
Nominal output frequency			50 / 60			Hz	
Power factor		0.8 leading ~ 0.8 lagging					
Total voltage harmonic distortion			THDv < 2%				
Disruption time of backup switch <sup>1</sup>			0			ms	
<b>Battery Connection</b>							
Battery module models		SigenStor BAT 5.0 / 8.0					
Number of modules per controller			1 ~ 6			pcs	
Battery module voltage range			300 ~ 600			V	
<b>Protection</b>							
Safety protection feature		DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter <sup>2</sup> , AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection					
<b>General Data</b>							
Dimensions (W / H / D)	700 / 300 / 245		700 / 300 / 260			mm	
Weight	18		36			kg	
Storage temperature range			-40 ~ 70			°C	
Operating temperature range			-30 ~ 60			°C	
Relative humidity range			0% ~ 95%				
Max. operating altitude			4000			m	
Cooling	Natural convection		Smart air cooling				
System ingress protection rating			IP66				
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)						
<b>Standard Compliance</b>							
Standard <sup>3</sup>	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477, IEC/EN 61000-6-1, IEC/EN 61000-6-2, AS 4777						

- This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.
- This is an optional feature only supported in certain models, please contact Sigenenergy for more information.
- For all standards refer to the certificates category on the Sigenenergy website.

## Sigen Energy Controller 5.0–30.0 kW Three Phase Australia

SigenStor EC	5.0 TP	10.0 TP	15.0 TP	20.0 TP	25.0 TP	30.0 TP	Units
<b>DC Input (from PV)</b>							
Max. PV power	8000	16000	24000	32000	40000	48000	W
Max. DC input voltage			1100				V
Nominal DC input voltage			600				V
Start-up voltage			180				V
MPPT voltage range			160 ~ 1000				V
Number of MPP trackers	2	3	3	4	4	4	
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
<b>AC Output (on-grid)</b>							
Nominal output power	5000	9999	15000	20000	25000	29900	W
Max. output apparent power	5500	9999	15000	22000	27500	29900	VA
Nominal output current	7.6	14.4	21.7	30.4	38.0	43.3	A
Max. output current	8.4	14.4	21.7	33.4	41.8	43.3	A
Nominal output voltage			380 / 400				V
Nominal grid frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%				
<b>Efficiency</b>							
Max. efficiency	98.1%	98.3%	98.3%	98.3%	98.3%	98.4%	
European efficiency	96.1%	97.5%	97.9%	97.9%	98.0%	98.0%	
<b>AC Output (backup)</b>							
Nominal output power	5000	10000	15000	20000	25000	30000	W
Max. output apparent power	5500	11000	16500	22000	27500	33000	W
Peak output power (10 seconds)	7500	15000	22500	30000	30000	36000	W
Nominal output current	7.6	15.2	22.8	30.4	38.0	45.6	A
Max. output current	8.4	16.7	25.1	33.4	41.8	50.1	A
Peak output current (10 seconds)	11.4	22.8	34.2	45.6	45.6	54.7	A
Nominal output voltage			380 / 400				V
Nominal output frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total voltage harmonic distortion			THDv < 2%				
Disruption time of backup switch <sup>1</sup>			0				ms
<b>Battery Connection</b>							
Battery module models		SigenStor BAT 5.0 / 8.0					
Number of modules per controller			1 ~ 6				pcs
Battery module voltage range			600 ~ 900				V
<b>Protection</b>							
Safety protection feature		DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter <sup>2</sup> , AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection					
<b>General Data</b>							
Dimensions (W / H / D)		700 / 300 / 260					mm
Weight	36	36	36	36	36	38	kg
Storage temperature range			-40 ~ 70				°C
Operating temperature range			-30 ~ 60				°C
Relative humidity range			0% ~ 95%				
Max. operating altitude			4000				m
Cooling			Smart air cooling				
System ingress protection rating			IP66				
Communication		WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)					
<b>Standard Compliance</b>							
Standard <sup>3</sup>	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-6-1, IEC/EN 61000-6-2, AS 4777						

- This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.
- This is an optional feature only supported in certain models, please contact Sigenenergy for more information.
- For all standards refer to the certificates category on the Sigenenergy website.


# Sigen Battery

- 280Ah cell capacity, low voltage & durable
- 100% DoD, full usage of energy capacity\*
- Multi-layer full battery safety protection
- Visible battery status on mySigen App
- Quick connectors for fast installation
- Parallel connections for flexible battery mix

\*Refers to usable capacity. Battery must be recharged within 7 days after being fully discharged to avoid over-discharge.

## Sigen Battery

SigenStor BAT	5.0	8.0	Units
<b>Performance Specification</b>			
Battery type	LiFePO4		
Cell capacity	280 Ah		
Cycle life <sup>1</sup>	10000		
Total energy capacity	5.38	8.06	kWh
Usable energy capacity <sup>2</sup>	5.2	7.8	kWh
Depth of discharge <sup>3</sup>	100%		
Max. charge / discharge power	2500	4000	W
Max. charge / discharge current	7.5	12.0	A
Peak charge / discharge power (10 seconds)	3750	6000	W
<b>General Data</b>			
Weight	55	70	kg
Dimensions (W / H / D)	767 / 270 / 260 mm		
Storage temperature range	-25 ~ 60 °C		
Operating temperature range	-20 ~ 55 °C		
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000 m		
Cooling	Natural convection		
System ingress protection rating	IP66		
Installation method	Floor standing / Wall-mounted		
Number of modules per controller	1 ~ 6 pcs		
Compatible inverters	SigenStor EC series Sigen Hybrid SP2/TP2 series <sup>4</sup>		
<b>Standard Compliance</b>			
Standard	IEC/EN 60730-1, UN 38.3, IEC/EN 62619, IEC/EN 63056, IEC/EN 62040		
<b>SigenStor BC</b>			
Operating voltage range	300 ~ 900 V		
Weight	8 kg		
Dimensions (W / H / D)	850 / 260 / 110 mm		
Compatible battery system	SigenStor BAT series		
Compatible inverter	Sigen Hybrid SP2/TP2 series		

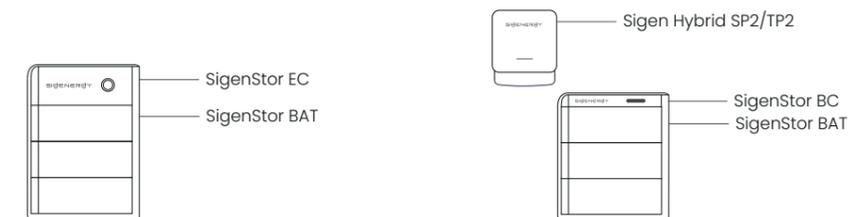

1. This is provided by the battery cell manufacturer. Based on cell test condition of 25±2°C, 0.5C charge and discharge rate and SOH=60%.
2. Test conditions: 100% depth of discharge, 0.2C rate charge & discharge averagely at 25°C, at the beginning of life.
3. Refers to the usable energy capacity.
4. SigenStor BC must be used if Sigen Hybrid SP2/TP2 is to be connected to the Sigen Battery.



# Sigen EV DC Charging Module

- V2X ready technology, future proof
- Max. 25 kW bi-directional charging
- 150V ~ 1000V charging, wide EV compatibility
- Charge EV with green solar power
- Remote control on mySigen App
- IP66 system protection, maintenance free

## Sigen EV DC Charging Module 12 / 25 kW

SigenStor EVDC <sup>1</sup>	12	25	Units
<b>DC Charging</b>			
Max. charging power of charging port	12.5	25	kW
Max. discharging power of charging port	12.5	25	kW
Operation voltage range	150 ~ 1000		V
Max. operation current	40	80	A
Charging interface	CCS2		
<b>Protection</b>			
Short-circuit protection	Supported		
Over / Under voltage protection	Supported		
Overload protection	Supported		
Over temperature protection	Supported		
Reverse polarity protection	Supported		
Welded contactor check	Supported		
<b>General Data</b>			
Dimensions (W / H / D)	700 / 270 / 260		mm
Weight <sup>2</sup>	39 (7.5m cable) / 41 (10m cable)		kg
Storage temperature range	-40 ~ 70		°C
Operating temperature range	-30 ~ 60		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000		m
Cooling	Smart air cooling		
System ingress protection rating	IP66		
Integrated charging cable length <sup>3</sup>	7.5 / 10		m
<b>Function</b>			
Authentication	RFID card / App / No authentication		
Application	Bi-directional V2X operation <sup>4</sup> , Smart load management		
User interfaces	LED indicator, App, RFID		
Remote function	OTA, Remote diagnostics		
<b>Standard Compliance</b>			
Standard <sup>5</sup>	EN IEC 61851-1, EN 61851-23, EN IEC 61851-21-2, ETSI EN 303 645		

1. Sigen EV DC Charging Module needs to be used together with Sigen Energy Controller.
2. The net weight includes the CCS2 cable-assembly also, but excludes the exteriors, wall-mounting fixtures and the related attachments.
3. Integrated charging cable length refers to the length of the cable that extends from the Sigen EV DC Charging Module, not the length of the exposed cable.
4. V2X functionality is limited by the EV's capabilities. Once the relevant standards are published and tested, V2X feature can be upgraded through the OTA. For the official support of vehicle models and support timelines, please refer to future announcement made on the official website.
5. For all standards refer to the certificates category on the Sigenenergy website.



SIGENERGY



# Sigen Hybrid Inverter

**5.0 – 12.0kW** Single Phase

**5.0 – 30.0kW** Three Phase

- Battery ready, future proof
- DC/AC ratio up to 2 (single phase)
- Up to 4 MPP. trackers (three phase)
- IP66 protection rating

## Sigen Hybrid Inverter 5.0–12.0 kW Single Phase Australia

Sigen Hybrid	5.0 SP	6.0 SP	8.0 SP	10.0 SP	12.0 SP	Units
<b>DC Input</b>						
Max. PV power	10000	12000	16000	20000	24000	W
Max. DC input voltage			600			V
Nominal DC input voltage			350			V
Start-up voltage			100			V
MPPT voltage range			50 ~ 550			V
Number of MPP trackers	2	2	3	4	4	
Number of PV strings per MPPT			1			
Max. input current per MPPT			16			A
Max. short-circuit current per MPPT			20			A
<b>AC Output (on-grid)</b>						
Nominal output power	4999	6000	8000	9999	12000	W
Max. output apparent power	4999	6600	8800	9999	12000	VA
Nominal output current	21.7	27.3	36.4	43.4	54.6	A
Max. output current	21.7	30.0	40.0	43.4	54.6	A
Nominal output voltage	220 / 230 / 240			220 / 230		V
Nominal grid frequency			50 / 60			Hz
Power factor		0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%			
<b>Efficiency</b>						
Max. efficiency	98.0%	98.0%	97.6%	97.6%	97.6%	
European efficiency	97.4%	97.4%	97.0%	97.0%	97.0%	
<b>Additional Features</b>						
Compatible battery module	SigenStor BAT 5.0 / 8.0					
Number of modules per controller			1 ~ 6			pcs
Battery module voltage range			300 ~ 600			V
Off-grid peak output power (10 seconds)	7500	9000	12000	15000	18000	W
Off-grid peak output current (10 seconds)	34.1	40.9	54.6	68.2	81.8	A
Nominal output voltage	220 / 230 / 240			220 / 230		V
<b>Protection</b>						
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter <sup>1</sup> , AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection					
<b>General Data</b>						
Dimensions (W / H / D)	700 / 300 / 268		700 / 300 / 283			mm
Weight	18		36			kg
Storage temperature range	-40 ~ 70					°C
Operating temperature range	-30 ~ 60					°C
Relative humidity range	0% ~ 95%					
Max. operating altitude	4000					m
Cooling	Natural convection		Smart air cooling			
Ingress protection rating	IP66					
Installation method	Wall-mounted					
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)					
<b>Standard Compliance</b>						
Standard <sup>2</sup>	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477, IEC/EN 61000-6-1, IEC/EN 61000-6-2, AS 4777					

- <sup>1</sup> This is an optional feature only supported in certain models, please contact Sigenenergy for more information.
- <sup>2</sup> For all standards refer to the certificates category on the Sigenenergy website.

## Sigen Hybrid Inverter 5.0–30.0 kW Three Phase Australia

Sigen Hybrid	5.0 TP	10.0 TP	15.0 TP	20.0 TP	25.0 TP	30.0 TP	Units
<b>DC Input</b>							
Max. PV power	8000	16000	24000	32000	40000	48000	W
Max. DC input voltage			1100				V
Nominal DC input voltage			600				V
Start-up voltage			180				V
MPPT voltage range			160 ~ 1000				V
Number of MPP trackers	2	3	3	4	4	4	
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
<b>AC Output (on-grid)</b>							
Nominal output power	5000	9999	15000	20000	25000	29900	W
Max. output apparent power	5500	9999	15000	22000	27500	29900	VA
Nominal output current	7.6	14.4	21.7	30.4	38.0	43.3	A
Max. output current	8.4	14.4	21.7	33.4	41.8	43.3	A
Nominal output voltage			380 / 400				V
Nominal grid frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%				
<b>Efficiency</b>							
Max. efficiency	98.1%	98.3%	98.3%	98.3%	98.3%	98.4%	
European efficiency	96.1%	97.5%	97.9%	97.9%	98.0%	98.0%	
<b>Additional Features</b>							
Compatible battery module	SigenStor BAT 5.0 / 8.0						
Number of modules per controller			1 ~ 6				pcs
Battery module voltage range			600 ~ 900				V
Off-grid peak output power (10 seconds)	7500	15000	22500	30000	30000	36000	W
Off-grid peak output current (10 seconds)	11.4	22.8	34.2	45.6	45.6	54.7	A
Nominal output voltage			380 / 400				V
<b>Protection</b>							
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter <sup>1</sup> , AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection						
<b>General Data</b>							
Dimensions (W / H / D)			700 / 300 / 283				mm
Weight	36	36	36	36	36	38	kg
Storage temperature range	-40 ~ 70						°C
Operating temperature range	-30 ~ 60						°C
Relative humidity range	0% ~ 95%						
Max. operating altitude	4000						m
Cooling	Smart air cooling						
Ingress protection rating	IP66						
Installation method	Wall-mounted						
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)						
<b>Standard Compliance</b>							
Standard <sup>2</sup>	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-6-1, IEC/EN 61000-6-2, AS 4777						

- <sup>1</sup> This is an optional feature only supported in certain models, please contact Sigenenergy for more information.
- <sup>2</sup> For all standards refer to the certificates category on the Sigenenergy website.



# Sigen Hybrid Inverter

**NEW**

**3.0-6.0 kW** Single Phase  
**5.0-12.0 kW** Three Phase

- Battery ready for future expansion
- Slimmest design, less install. requirements
- Fan-less design, powerful yet quiet
- IP66 protection rating, worry-free usage

## Sigen Hybrid Inverter 3.0–6.0 kW Single Phase Australia Preliminary

Sigen Hybrid	3.0 SP2 AU	5.0 SP2 AU	6.0 SP2 AU	Units
<b>DC Input (from PV)</b>				
Max. PV power	6000	10000	12000	W
Max. DC input voltage		600		V
Nominal DC input voltage		350		V
Start-up voltage		100		V
MPPT voltage range		50 ~ 550		V
Number of MPP. trackers		2		
Number of PV strings per MPPT		1		
Max. input current per MPPT		16		A
Max. short-circuit current per MPPT		22		A
<b>AC Output (on-grid)</b>				
Nominal output power	3000	4999	6000	W
Max. output apparent power	3300	4999	6600	VA
Nominal output current	13.6	21.7	27.3	A
Max. output current	15.0	21.7	30.0	A
Nominal output voltage		230 / 240		V
Nominal grid frequency		50 / 60		Hz
Power factor		0.8 leading ~ 0.8 lagging		
Total current harmonic distortion		THDi < 3%		
<b>Efficiency</b>				
Max. efficiency	98.4%	98.5%	98.5%	
European efficiency	97.4%	97.9%	97.9%	
<b>Additional features</b>				
Battery controller models	SigenStor BC			
Battery module models	SigenStor BAT series			
Number of modules per controller	1 ~ 6			pcs
Battery module voltage range	300 ~ 600			V
Peak output power (10 seconds)	4500	7500	9000	W
Nominal output voltage	230 / 240			V
<b>Protection</b>				
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter, AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection			
Inverter topology	Non-isolation			
Protective class	I			
Overvoltage category	DC II, AC III			
Active anti-islanding protection	Frequency shift			
<b>General Data</b>				
Dimensions (W / H / D)	370 / 465 / 99			mm
Weight	< 11			kg
Storage temperature range	-40 ~ 70			°C
Operating temperature range	-30 ~ 60			°C
Relative humidity range	0% ~ 95%			
Max. operating altitude	4000			m
Cooling	Natural convection			
System ingress protection rating	IP66			
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)			
Installation method	Wall-mounted			
Night consumption	≤ 3			W
Noise	≤ 25			dB

1. This document reflects current technology and is subject to change without notice. Refer to the Sigenenergy website for the latest information.

## Sigen Hybrid Inverter 5.0–12.0 kW Three Phase Australia Preliminary

Sigen Hybrid	5.0 TP2 AU	6.0 TP2 AU	8.0 TP2 AU	10.0 TP2 AU	12.0 TP2 AU	Units
<b>DC Input (from PV)</b>						
Max. PV power	10000	12000	16000	20000	24000	W
Max. DC input voltage			1100			V
Nominal DC input voltage			600			V
Start-up voltage			180			V
MPPT voltage range			160 ~ 1000			V
Number of MPP. trackers		2				
Number of PV strings per MPPT		1		1/2		
Max. input current per MPPT		16		16/32	16/32	A
Max. short-circuit current per MPPT		22		22/44	22/44	A
<b>AC Output (on-grid)</b>						
Nominal output power	5000	6000	8000	9999	12000	W
Max. output apparent power	5000	6600	8800	9999	13200	VA
Nominal output current	7.2	9.1	12.2	14.4	18.2	A
Max. output current	7.2	10.0	13.4	14.4	20.1	A
Nominal output voltage	230/400, 240/415 (3W/N+PE)					V
Nominal grid frequency	50 / 60					Hz
Power factor	0.8 leading ~ 0.8 lagging					
Total current harmonic distortion	THDi < 3%					
<b>Efficiency</b>						
Max. efficiency	98.4%	98.7%	98.7%	98.7%	98.7%	
European efficiency	97.5%	97.7%	98.0%	98.1%	98.2%	
<b>Additional features</b>						
Battery controller models	SigenStor BC					
Battery module models	SigenStor BAT series					
Number of modules per controller	1 ~ 6					pcs
Battery module voltage range	600 ~ 900					V
Peak output power (10 seconds)	7500	9000	12000	15000	18000	W
Nominal output voltage	230/400, 240/415 (3W/N+PE)					V
<b>Protection</b>						
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter, AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection					
Inverter topology	Non-isolation					
Protective class	I					
Overvoltage category	DC II, AC III					
Active anti-islanding protection	Frequency shift					
<b>General Data</b>						
Dimensions (W / H / D)	475 / 568 / 99					mm
Weight	< 17					kg
Storage temperature range	-40 ~ 70					°C
Operating temperature range	-30 ~ 60					°C
Relative humidity range	0% ~ 95%					
Max. operating altitude	4000					m
Cooling	Natural convection					
System ingress protection rating	IP66					
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)					
Installation method	Wall-mounted					
Night consumption	≤ 5					W
Noise	≤ 29					dB

1. This document reflects current technology and is subject to change without notice. Refer to the Sigenenergy website for the latest information.

# Sigen Energy Gateway for Australia

Preliminary

Sigen Gateway	Home SP AU	Home TP AU	Units
<b>Grid Connection</b>			
Grid connection type	Single phase	Three phase	
Nominal AC input / output voltage	220 / 230 / 240	380 / 400	V
Nominal AC input / output current	54.6	45.6	A
Nominal AC input / output power	12	30	kW
Nominal AC frequency		50 / 60	Hz
Disruption time of backup switch <sup>1</sup>		0	ms
<b>AC Output to Backup Port</b>			
Nominal AC output voltage	220 / 230 / 240	380 / 400	V
Nominal AC output current	54.6	45.6	A
Nominal AC output power	12	30	kW
Nominal AC frequency		50 / 60	Hz
Overvoltage category		III	
<b>AC Output to Non-Backup Port</b>			
Nominal AC output voltage	220 / 230 / 240	380 / 400	V
Nominal AC output current	54.6	45.6	A
Nominal AC output power	12	30	kW
Nominal AC frequency		50 / 60	Hz
<b>Inverter Connection</b>			
Nominal AC voltage	220 / 230 / 240	380 / 400	V
Nominal AC input current	54.6 (INV1), 32 (INV2) <sup>2</sup>	45.6 (INV1), 32 (INV2) <sup>3</sup>	A
<b>Smart Port Connection</b>			
Generator output voltage	220 / 230 / 240	380 / 400	V
Nominal input / output current	54.6	45.6	A
Nominal AC input / output power	12	30	kW
Generator 2-wire start		Supported	
<b>General Data</b>			
Dimensions (W / H / D)		480 / 700 / 194	mm
Weight		20	kg
Storage temperature range		-40 ~ 70	°C
Operating temperature range		-30 ~ 55	°C
Relative humidity range		0% ~ 95%	
Max. operation altitude		4000	m
Cooling		Natural convection	
Ingress protection rating		IP54	
Communication		Fast Ethernet, RS485, dry contact	
Installation method		Wall mounted, rear wiring supported	

1. This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the backup loads.

2. For Sigenenergy single phase inverter products, 8.0-12.0 kW inverters should be connected to the INV1 port, 3.0-6.0 kW inverters should be connected to the INV2 port. The sum of the parallel power of the Sigenenergy inverters cannot exceed 12 kW.

3. For Sigenenergy three phase inverter products, 15.0-30.0 kW inverters should be connected to the INV1 port, 5.0-15.0 kW inverters should be connected to the INV2 port. The sum of the parallel power of the Sigenenergy inverters cannot exceed 30 kW.

# Sigen Energy Gateway

- Seamless switch to backup mode, worry-free energy usage
- Ready for generator, heat pump or other controllable loads
- Support both whole home backup & partial home backup
- 350 ms reverse power flow protection of grid & generator
- Uninterrupted power supply through PV+ESS/grid/generator
- Support rear wiring for more flexible installation



# Sigen Communication Module

- IP66 protection rating, more reliable
- Plug & play, easy to use
- Support 2G / 3G / 4G communication

## Sigen Communication Module

	Sigen CommMod	Units
Connection interface	USB	
Installation type	Plug-and-play	
Display	LED indicators	
Dimensions (W / H / D)	52 / 112 / 33	mm
Weight	90	g
Ingress protection rating	IP66	
Power consumption (typical)	< 4	W
Supported SIM card	Micro-SIM (12mm * 15mm)	
Supported standards	LTE-FDD B1/3/7/8/20/28A LTE-TDD B38/40/41 WCDMA B1/8 GSM/EDGE B3/8	
Storage temperature range	-40 ~ 70	°C
Operating temperature range	-30 ~ 60	°C
Relative humidity range	0% ~ 95%	
Max. operating altitude	4000	m
Controller / Inverter compatibility	Sigen Energy Controller series Sigen Hybrid Inverter series	

1. To ensure stable data transmission, the mobile signal for 2G signal  $\geq 4$  bars, 3G/4G signal  $\geq 3$  bars.





# Sigen Power Sensor

- 1% high-accuracy power detection for precise control
- LCD real-time info display, easy to operate and check
- Integrate smoothly with Sigenergy devices, no need for setup
- Top class 100 A direct connection in power sensor with built-in CT
- Support export/import limitations and ready for AI evolving
- 100 ms data refresh rate, instantaneous data feed

## Sigen Power Sensor

Sigen Sensor <sup>1</sup>	SP-DH	SP-CT120-DH	TP-DH	TP-CT120-DH	Units
<b>Power Supply</b>					
Grid connection type	1P2W		3P3W/3P4W		
AC input voltage range	176 ~ 276		173 ~ 480		
Nominal AC frequency			50 / 60		Hz
Max. operating current	100	-	100	-	A
<b>Measurement Accuracy</b>					
Voltage accuracy	0.5%				
Current accuracy	0.5%				
Power accuracy	1%				
Frequency accuracy	0.2%				
<b>Communication</b>					
Interface	RS485				
Baud rate	9600				
Protocol	Modbus RTU				
<b>General Data</b>					
Dimensions (W / H / D)	36 / 100 / 63	18 / 118 / 64	72 / 100 / 66	72 / 94.5 / 65	mm
Weight	0.20	0.07	0.32	0.20	kg
Storage temperature range	-40 ~ 70				
Operating temperature range	-25 ~ 60				
Relative humidity range	0% ~ 90%				
Ingress protection rating	IP20				
Installation method	DIN Rail 35 mm				
<b>CT Accessory</b>					
Number of CT	-	1	-	3	pcs
Cable length of CT	-	1	-	1	m
Inner diameter of CT	-	16	-	16	mm
Weight of CT	-	0.09	-	0.09	kg
Max. operating current of CT	-	120	-	120	A
<b>Standard Compliance</b>					
Standard	EN 61010-1:2010, EN 61010-2-030:2010				

1. For more models refer to the Sigenergy website.

# Sigen EV AC Charger



- Green power charging with Sigenergy home energy solution
- Data tracking & scheduled charging on mySigen App
- Dynamic load management to prevent overload, user-friendly charging\*
- Easy installation with less steps and top/bottom entry option
- Integrated residual current failure protection reduces installation costs
- IP65 protection rating, worry-free outdoor usage with easy O&M

\* Only works with Sigenergy home energy solution or additional Sigen Power Sensor

## Sigen EV AC Charger 7 / 11 / 22 kW

Sigen EVAC	7	11	22	Units
<b>AC Input &amp; Output</b>				
Nominal charging power	7	11	22	kW
Nominal output voltage	1P/N/PE, 220 ~ 240	3P/N/PE, 220 ~ 240 / 380 ~ 415	3P/N/PE, 220 ~ 240 / 380 ~ 415	V
Output current range	6 ~ 32	6 ~ 16	6 ~ 32	A
Nominal AC frequency		50 / 60		Hz
Vehicle connection	Type 2 connector / Type 2 socket with shutter			
AC input cable width range	2.5 ~ 6.0			mm <sup>2</sup>
<b>Protection</b>				
Integrated DC fault detection <sup>1</sup>		6		mA
Integrated AC fault detection <sup>1</sup>		30		mA
Flame retardant rating	UL94-5VB			
Over / Under voltage protection	Supported			
Overload protection	Supported			
Over temperature protection	Supported			
PEN protection	Supported			
Randomized charging delay	Supported			
Ground fault protection	Supported			
Surge protection	Supported			
Grounding system	TT, TN, IT			
<b>User Interface &amp; Communication</b>				
Protocol	RS485, Modbus RTU			
Communication	4G / WLAN / Fast Ethernet			
Authentication	RFID card / App / Auto-charge (no authentication)			
Display	LED indicator / App			
Charging mode <sup>2</sup>	100% PV charging / Solar boost charging / Fast charging			
Metering	External meter with RS485 / Integrated metering IC			
Dynamic load management <sup>3</sup>	Supported			
Phase switching	Supported			
OCPP protocol	OCPP 1.6J ED 2			
<b>General Data</b>				
Dimensions (W / H / D)	234 / 384 / 126			mm
Weight (case B / case C)	4.5 / 6.4			kg
Storage temperature range	-40 ~ 70			°C
Operating temperature range	-30 ~ 55			°C
Relative humidity range	5% ~ 95%			
Max. operating altitude	4000			m
Cooling	Natural convection			
Ingress protection rating	IP65			
Installation method	Wall-mounted			
Application environment	Outdoor / Indoor			
Standby self-consumption	< 3.6			W
Standard charging cable length	5			m
<b>Standard Compliance</b>				
Standard <sup>4</sup>	EN IEC 61851-1, IEC 62995, EN IEC 61851-21-2, ETSI EN 300 330 V2.1.1, ETSI EN 301 511 V12.5.1, EN IEC 62311, EN50665, ETSI EN 300 328 V2.2.2			

1. Residual direct current protective device (RDC-PD) with integrated AC pulsating DC and 6mA DC detection, evaluation and mechanical switching in the Sigen EV AC Charger is tested according to IEC 62955.
2. This function needs to be used with SigenStor.
3. This function needs to be used with Sigen Power Sensor.
4. For all standards refer to the certificates category on the Sigenergy website.

# mySigen App

Intelligent energy management within touches  
For homeowners

Smarter energy life empowered by mySigen App



## Real-time monitoring

Energy data refresh every 10 seconds  
Visible energy flow & related devices  
Auto. system network display on App



## AI Mode

Provide intelligent optimization suggestions on system mode, battery capacity and energy usage




## Sigen Shield

Discover industry-leading battery safety features



## Fun ambient lighting

Customizable lighting language  
Add personality to your system

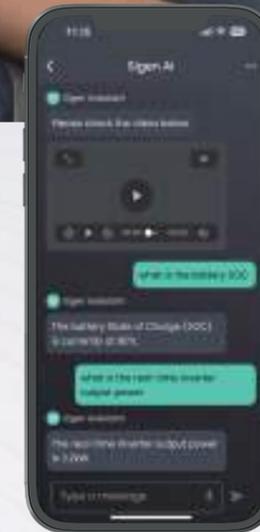

## Sigen AI

After-sales engineer  
Home energy analyst  
Device mgmt. assistant



## Interactive services

AI-integrated service interface  
Self-diagnosis to identify problems  
Submit service requests via the App

\*The interface may change after the mySigen App version is updated, please refer to the actual interface.

# mySigen App

Intelligent energy management within touches  
For installers

Simplify your installation process, one App does it all



Step 1

Scan to add a new system




Step 2

Fill out details




Step 3

Fast software upgrade

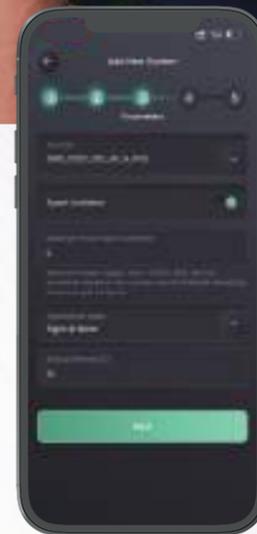

Step 4

Confirm preset parameters

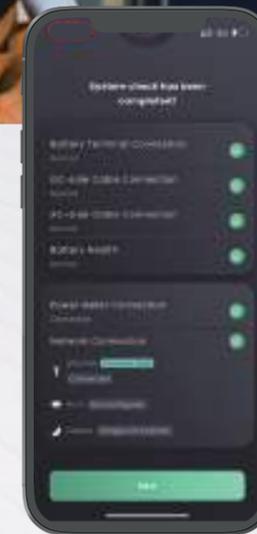

Step 5

One-click full system check



Step 6

Confirm

\*The interface may change after the mySigen App version is updated, please refer to the actual interface.

# Leading the Way in Intelligent Manufacturing

Located in the Lin-gang New Area, Shanghai, a hub of world-class enterprises with strong innovative strengths, the 20,000 sqm manufacturing center is equipped with state-of-the-art technology and innovative manufacturing processes that allow us to produce high-quality products with exceptional efficiency. It also features the latest manufacturing execution system (MES) which streamlines our operations and enables real-time monitoring of the production process.





## Runs on Solar by Sigenergy solutions for a Sustainable Tomorrow

By adopting Sigenergy products and embracing solar energy, our factory has realized green manufacturing. With a 3,000 sqm PV plant on the rooftop, We have significantly reduced our reliance on fossil fuels and effectively cut carbon footprint during the manufacturing process. Our solar-powered production also translates into better efficiency and higher cost savings for our business. We are proud to be making a positive impact on the environment, and are committed to continuing to lead our sustainability practices to help build a better world for future generations.

### Plant Size

 3,000 m<sup>2</sup>  362 kW<sub>p</sub>  240 kW<sub>ac</sub>  432 kWh

### Estimated Annual Generation

 398,200 kWh

### Community Contribution per Year

 309t CO<sub>2</sub> emission reduced

 269 equivalent of trees planted



# Where Quality Meets Perfection

At Sigenergy, our unwavering commitment to putting the customer first is at the core of everything we do. We firmly believe that delivering top-quality products is paramount to ensuring customer satisfaction and building long-term relationships. With a relentless pursuit of excellence, we constantly strive to develop innovative products that meet and exceed customer expectations. Our strict implementation of rigorous quality control guarantees that every product leaving our factories is of the highest standard. Moreover, we never settle for complacency; instead, we embrace a culture of continuous improvement to constantly enhance our products and surpass industry standards.



## Manufacturing Execution System (MES)

Quality and efficiency is consistently guaranteed by our MES system, which monitors, tracks, documents, and controls the entire manufacturing process from raw materials to finished products, as well as full product lifecycle management.



# Powering Homes Worldwide

## France

12 kW AC output  
24 kWh ESS capacity



## France

5 kW AC output  
8 kWh ESS capacity



## Australia

5 kW AC output  
16 kWh ESS capacity



## South Africa

12 kW AC output  
16 kWh ESS capacity



## South Africa

25 kW AC output  
24 kWh ESS capacity



## Australia

5 kW AC output  
16 kWh ESS capacity



## Australia

12 kW AC output  
48 kWh ESS capacity



## China

12 kW AC output  
24 kWh ESS capacity



## Switzerland

12 kW AC output  
24 kWh ESS capacity



## South Africa

25 kW AC output  
16 kWh ESS capacity



## Switzerland

12 kW AC output  
24 kWh ESS capacity



## USA

11 kW AC output  
13 kWh ESS capacity

